



Flygt D 8000

CORROSION-RESISTANT SUBMERSIBLE VORTEX PUMPS

xylem
Let's Solve Water

Free Line
group

OFFICIAL DISTRIBUTOR CENTRAL ASIA




a xylem brand

Wide open to the challenge of corrosive media

Handling corrosive wastewater containing a substantial amount of solids and/or fibrous matter poses distinct challenges. For times like these, there's the Flygt D 8000, a stainless steel submersible vortex pump. Designed to tackle tough fluid handling challenges, the Flygt D 8000 does the jobs that no other pump can do - reliably and cost-efficiently.

The Flygt D 8000 is a highly reliable submersible vortex pump that cost-effectively transports corrosive media. Completely made of stainless steel AISI 316, the Flygt D 8000 features a vortex impeller and wide throughlet that ensure consistent performance over time, trouble-free operation and minimal maintenance.

Engineered for demanding and potentially explosive environments, the Flygt D 8000 easily transports corrosive media for municipal sewage and industrial wastewater applications, with maximum 500 ppm chlorides, just as easily as it does for a wide range of applications in the chemical, food processing, pharmaceutical and textile industries.

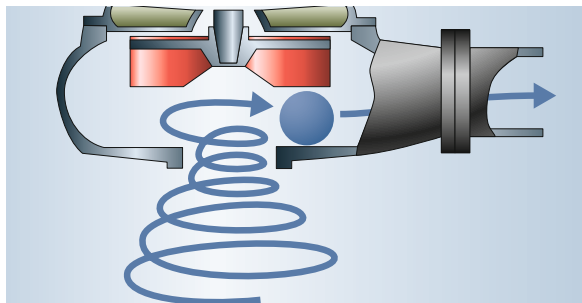

High operational reliability, low wear: The powerful pumping action of the vortex impeller enables easy passage of larger solids through a wide, unobstructed channel.

Straightforward non-clogging vortex design

The high quality and unmatched performance of the Flygt D 8000 should come as no surprise. After all, Xylem is the world-leading manufacturer and supplier of submersible pumps. Here are some of the design finesses that make the Flygt D 8000 the submersible vortex pump of choice.

Advantages

- **Reliable, cost-efficient performance.** Non-clogging vortex design delivers highly reliable, cost-effective performance.
- **Excellent corrosion-resistance.** Pump materials easily handle highly acidic or alkaline liquids with pH values between 2 and 14.
- **Reduced wear.** Minimal direct contact of the impeller vanes with solids greatly reduces wear.
- **Very low maintenance requirements.** The wide throughlet and reduced radial forces on the impeller enables operation at very low flows or shut off for extended periods without damage.
- Slim pump design for installation into smaller sumps, where required.
- Thermal sensors embedded in the stator windings to prevent overheating.



Precision casting improves performance and reduces weight.

Options

- Cable protection with stainless steel hose
- Leakage sensors in the stator and oil housings



Reliable design for high performance

International standards approvals.
All pumps are tested and approved in accordance with national and international standards (IEC 34-1 CSA).

Cable entry. Water resistant cable entry provides both sealing and strain relief functions to ensure a safe installation

Sensors. Leakage sensors in the stator and oil housing, together with external monitoring equipment, are available as options.

Two sets of mechanical shaft seals.
Work independently to provide double security.

Back impeller vanes. Prevent solids from entering the seal area and reduce pressure on the seal.

Wide throatlet. Enables the free passage of larger solids and abrasive particles up to 100 mm in diameter.


High-performance squirrel-cage induction motor. Provides reliable operation. Class H insulated, specially designed and manufactured by Xylem for submersible use.

Shaft. A short overhang virtually eliminates shaft deflection. Reduces noise levels and vibration while significantly increasing seal and bearing life.


Semi-recessed vortex impeller. Creates pumping action by transferring energy to the pumped fluid, which in turn produces a secondary swirling vortex flow.

Model	D 8050	D 8053	D 8056	D 8058
Rating 50Hz	1.5-2.6 kW	3.5-4 kW	5-7.5 kW	9-13 kW
Discharge (DN)	50 mm (2") 65 mm (2½") 100 mm (4")	50 mm (2") 65 mm (2½") 100 mm (4")	- 65 mm (2½") 100 mm (4")	- 65 mm (2½") 100 mm (4")
Preasure characteristic	LT, MT, HT	LT, MT, HT	LT, MT, HT	LT, HT

Performance
(50 Hz)

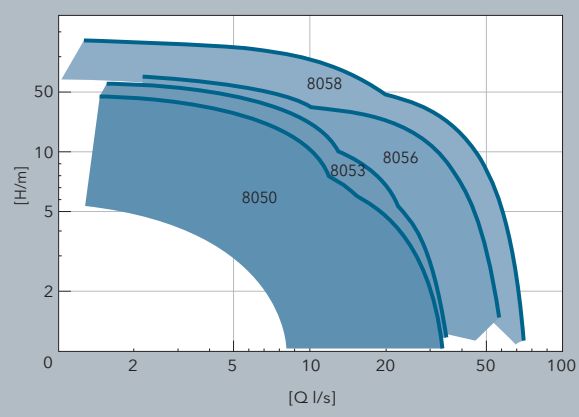


Methods of installation
DP

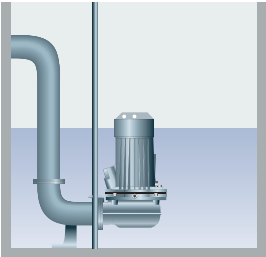

Totally secure: For stationary or semi-permanent fixed installation.

DS



Completely transportable: For temporary installation with stand and hose connection.

Xylem ['zīləm]

- 1) The tissue in plants that brings water upward from the roots
- 2) A leading global water technology company

We're 12,000 people unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

For more information on how Xylem can help you, go to xyleminc.com

Free Line group

We offer:

- Engineering and technical solutions of Xylem for water supply, wastewater and water purification systems, which are leading in the world.
- A full range of pumps and equipment for such applications as supplying drinking or untreated water, diversion of industrial wastewater, sewage, drainage, monitoring installations and operation, primary and secondary biological treatment, filtration and disinfection.
- Technical support and maintenance of pumps. Our local service center provides comprehensive services and support for safe, efficient and reliable operation. You can rely on us to ensure trouble-free operation and minimal downtime. We will quickly respond and give a professional answer to your questions, as well as provide high-quality service using original spare parts.

Free Line Group LLC

*Official distributor and service-partner of Xylem Inc.
in Uzbekistan, Tajikistan, Kyrgyzstan and
Turkmenistan*

Tel: +998 95 475-00-40
+998 90 350-38-68
+998 90 908-97-11

Makhtumkuli str. 105, Yashnabad distr.,
Business-center "ERA", Tashkent, Uzbekistan

email: info@flgroup.uz
Web: www.flgroup.uz